



Understanding Ethernet Communication - Topologies

by Steve Roberts - Director of Technology, KE2 Therm Solutions, Inc.

Introduction

Communications is one of the most dynamically changing industries. We are surrounded by continually evolving, state-of-the-art technology (wifi, smart phones, satellite TV, GPS) Advanced methods of communication have filtered into many industries and revolutionized their processes and procedures.

Understanding the advantage of utilizing Ethernet communications is important in helping the HVACR industry keep pace. Today, much of the HVACR industry lags behind in communications. Even highly complex building automation systems are generally operating using some sort of **serial bus** communication, which is almost 30 year old technology. And, new electronic controls being released in our industry are generally equipped for "bus" topology, perpetuating this antiquated method of communication between devices.


Serial Bus vs. Ethernet

Serial bus topology connects all devices to a host, but it is not a stand-alone solution for larger applications. **Figure 1** shows a familiar example of a serial bus arrangement of devices.

Wired or wireless Ethernet communications (the way that most people connect to the Internet) provides a much faster experience, remote monitoring and management of devices. However, all Ethernet communications are not created equal. The physical arrangement, or **topology**, of a network, including the configuration of computers, and other peripherals is the first step in developing a network (a collection of resources, i.e. computers, printers, controllers, servers).

Figure 1 - Example of Serial Bus Topology

Components are "daisy chained"

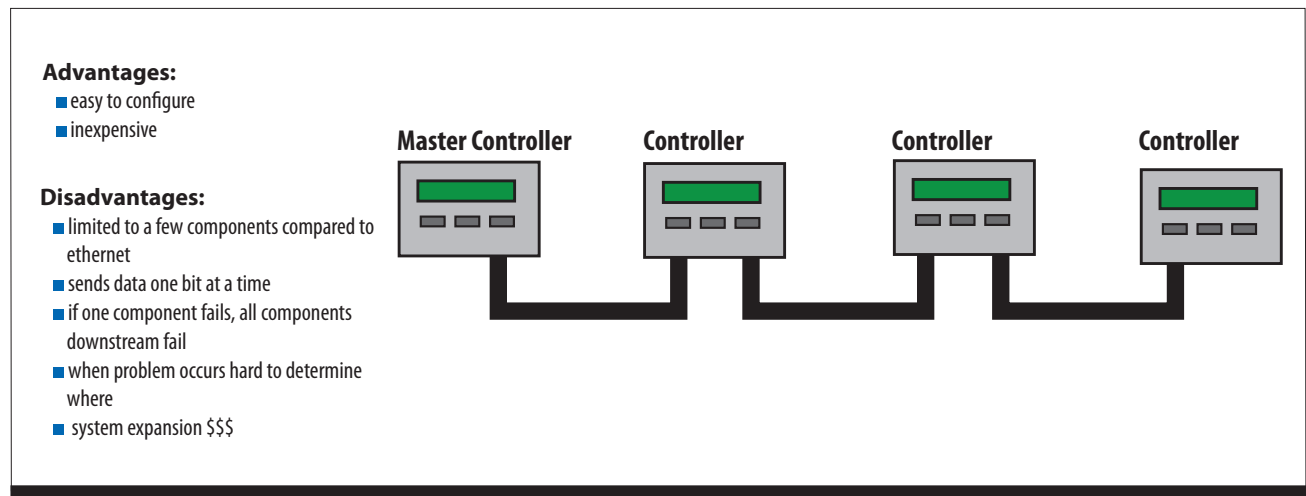

Ethernet Topologies – Bus – Star – Tree

There are three main Ethernet topologies, the **Bus**, the **Star** and the **Tree**.

Bus Topology


The original Ethernet communication standard released in 1983 was organized in a **bus** topology.

In a bus topology each **node** (controllers, monitors, printers) is physically linked in a simple chain, shown in **Figure 2**. It shares the serial bus problem of no fault tolerance. Similar to older style Christmas lights, if one of the lights in the chain goes out, the whole string goes out. And, just like those Christmas lights,

it is difficult to identify the source of the problem if a break, cut, or failure occurs.

The bus topology is impractical when dealing with more than a few linked devices. Expanding beyond a few nodes requires costly **gateways**, eliminating the main advantage of a bus arrangement. In the HVACR industry, many manufacturers still encourage this style of communication through their product design, providing additional ports on the device that encourage "daisy chaining" components. Using bus topology creates a less reliable network.

Figure 2 - Linear Bus Topology / 10 Base 2

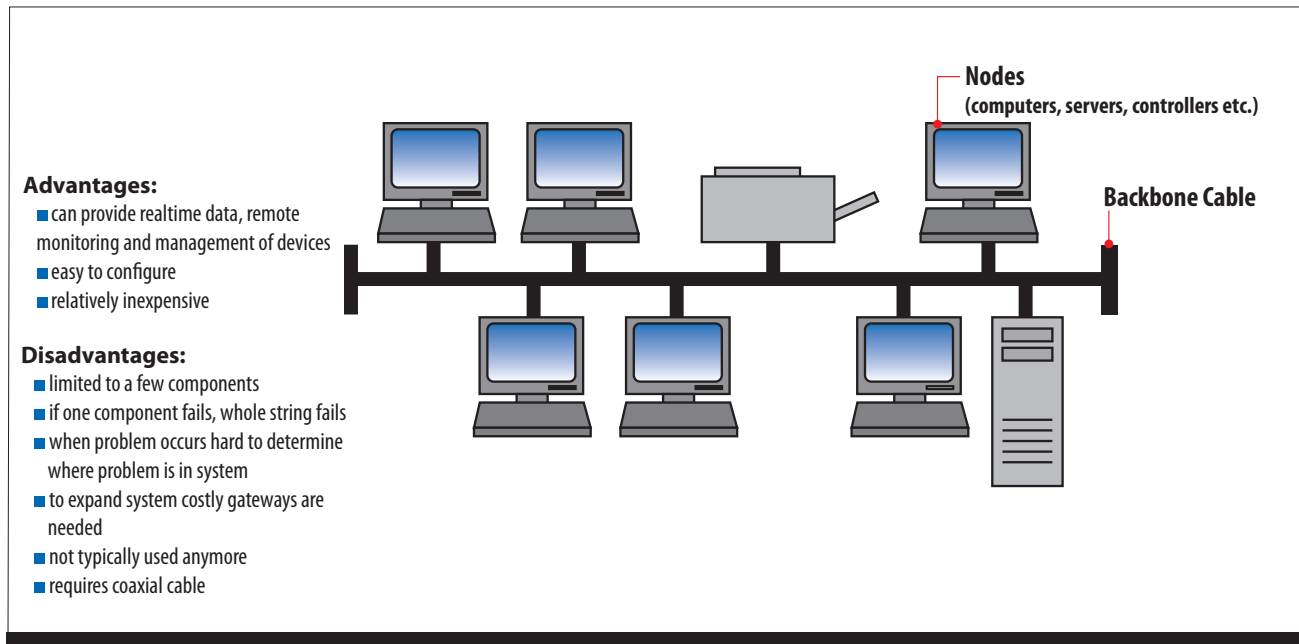


Star Topology

After realizing the inherent flaws with bus topology, enhancements were made to increase the stability of the network. The result is the **star** configuration, shown in **Figure 3**. In the star topology the individual nodes are linked to a **switch** (sometimes

inappropriately referred to as a hub). The switch speaks directly to each controller, or to other switches. In addition nodes can communicate with each other. Occasionally a switch will go down, however by linking several switches together, the various


Figure 3- Star Topology

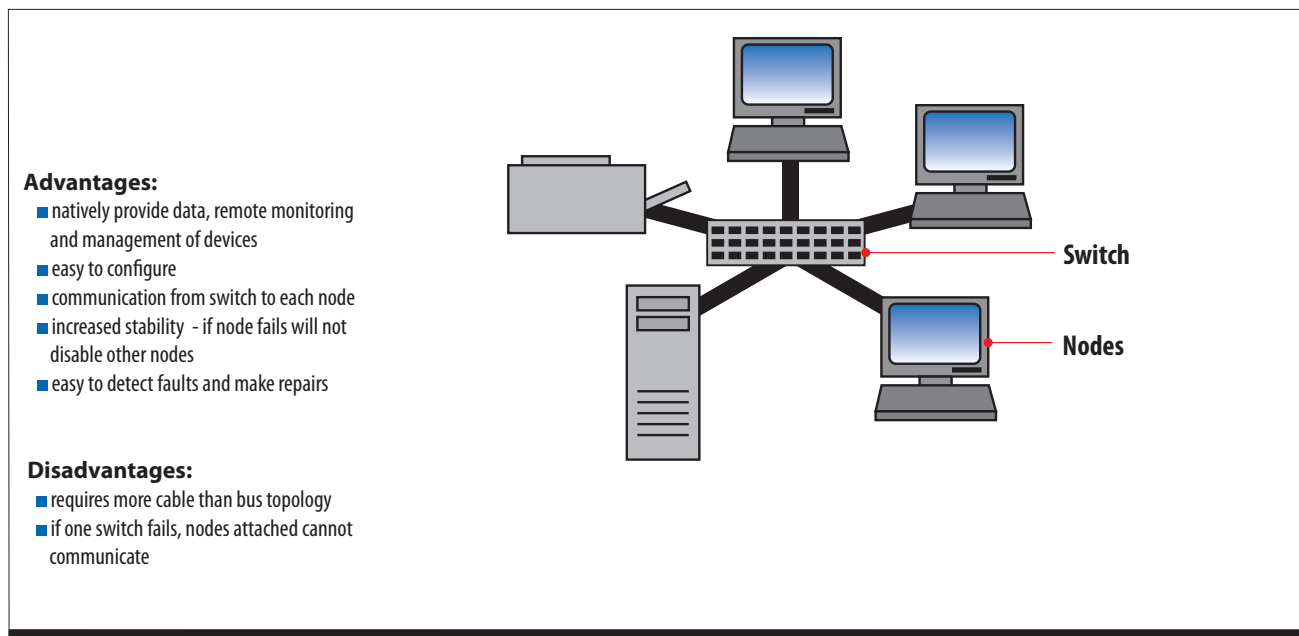

stars are linked. The devices can then communicate using the alternate switch. See **Figure 4**. With this structure it is also easy to detect faults, and make the appropriate repairs – especially critical when perishable inventory is at stake.

Figure 4 - Star Topology Linked to Other Stars

Provides increased system stability -- if one switch goes down, communications are automatically re-routed through another switch.

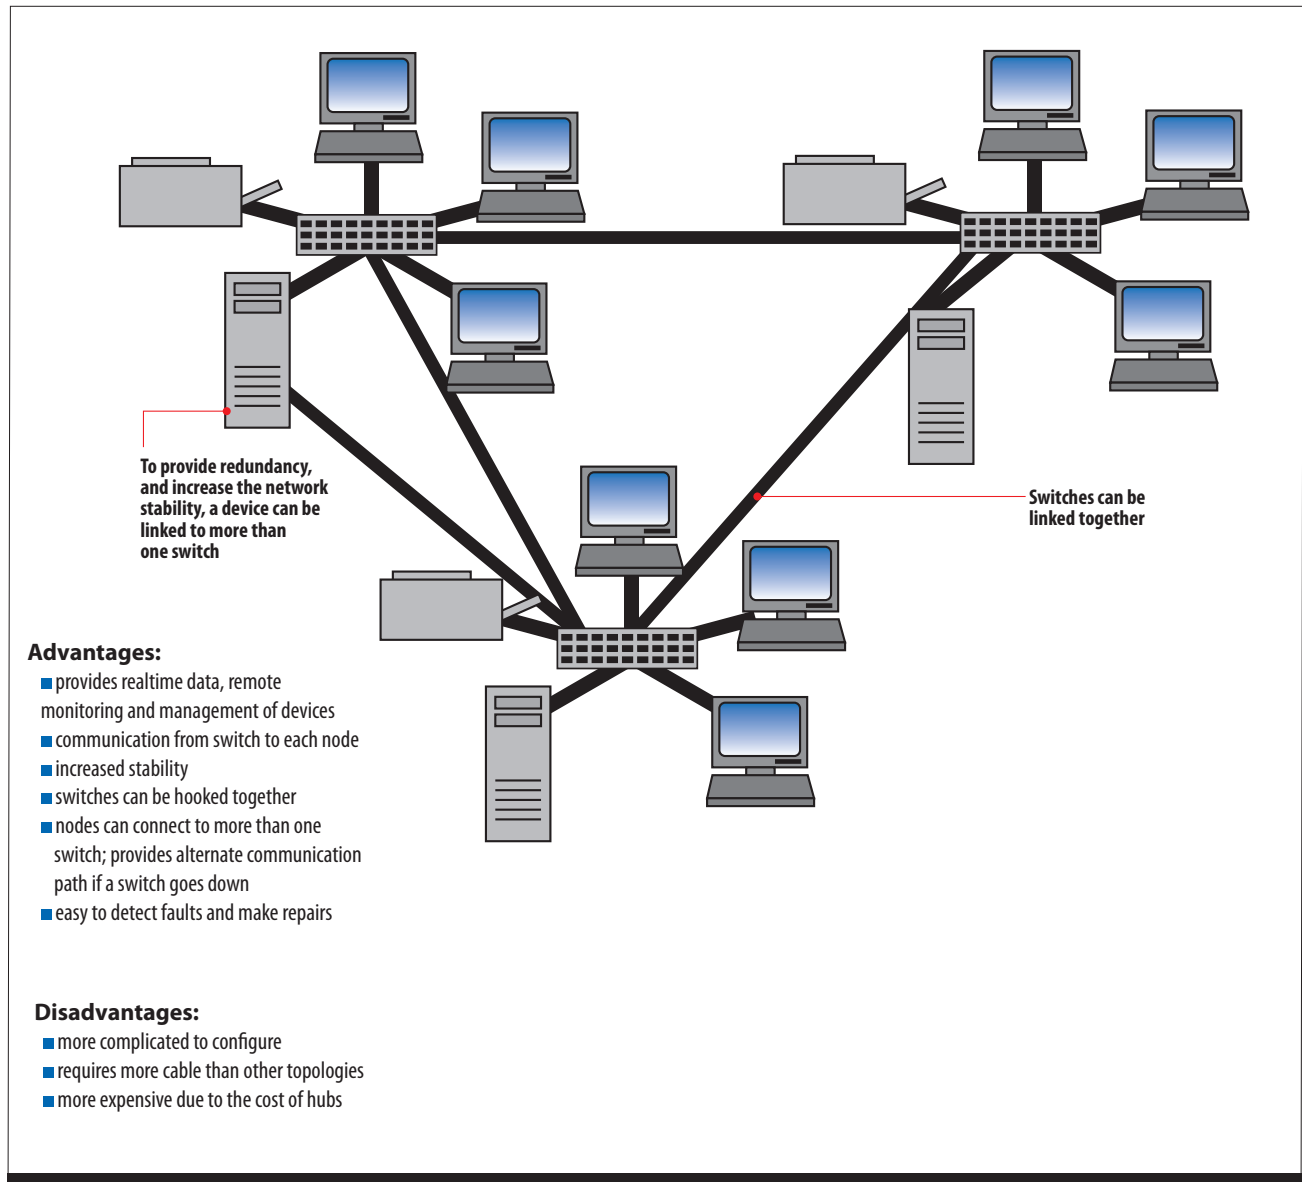


Tree Topology

A third topology has evolved as a hybrid of the bus and star topologies. It is known as a **tree**. An example of the tree is shown in **Figure 5**. Like the bus, the tree features a backbone cable, however instead of individual nodes connected to the cable, the

tree topology has stars branching off. The disadvantage of the tree is similar to that of the bus. If the main line breaks, an entire segment fails. Additionally, the tree topology is more difficult to configure and wire.

Figure 5 - Tree Topology

Hybrid of linear bus and star topologies - less stable than the star, if the backbone breaks and entire segment goes down

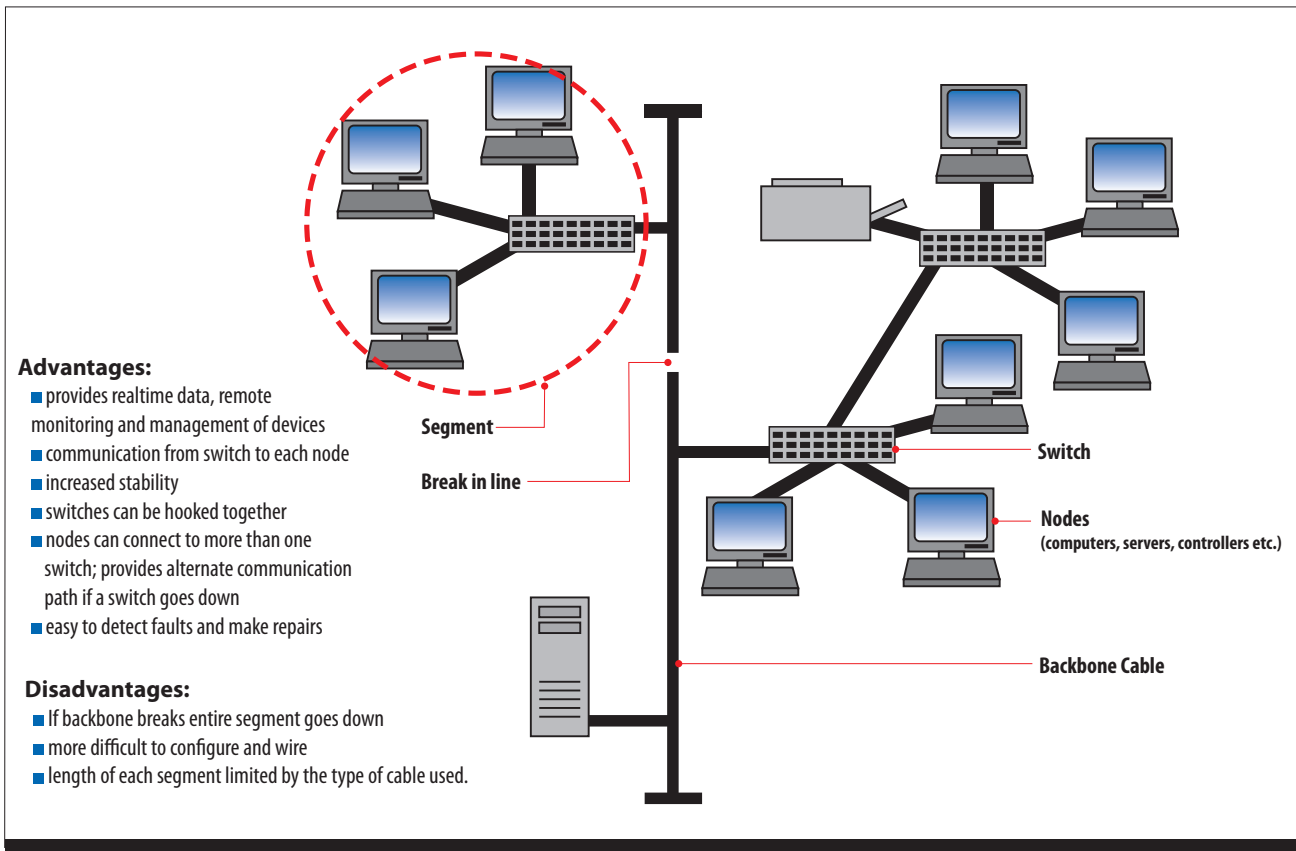

Conclusion

From complex topologies to the most simple, Ethernet offers efficient ways to connect across many platforms such as Mac, PC, Linux, Unix and IBM mainframes. Ethernet is more popular than any other protocol and is widely used for all types of communications.

Additional Educational Materials

Visit www.ke2therm.com to find additional articles.

- W.1.1 Frost and Defrost: How it happens, why it is needed.
- W.9.1 Basic Thermodynamics for Refrigeration and Air Conditioning Part 1
- W.9.2 Basic Thermodynamics for Refrigeration and Air Conditioning Part 2
- W.9.3 Basic Superheat, Saturation and Subcooling
- W.9.4 Electricity 101
- W.5.1 Understanding Ethernet Communications - **Networks**
- W.5.3 Understanding Ethernet Communications - **Cabling**
- W.5.4 Understanding Ethernet Communications - **Protocols**
- W.5.5 Understanding Ethernet Communications - **Glossary**